


By Antonio Angelo
<http://htmlkit.com/go/plugin/aatools>

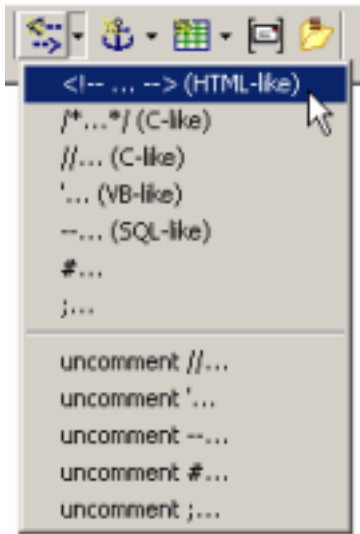

Version:	1.50
Date Updated:	01-Dec-2005
Author:	Antonio Angelo

Description

Adds options for using the selected text to create hyperlinks, generate tables, encode as numeric entities, insert file names and apply several different styles of comments.

Features:

- Comment and uncomment the selected text using common styles used by HTML and languages similar to C/C++/Java/C#, CSS, INI, Perl/PHP/Ruby, SQL and VB.
- Automatically selects the appropriate comment style based on the file extension. Supported file types include "html;htm" for " " comments, "css;c;cpp;h;hpp;hks;js;java;pas;php;php3;php4;mel" for "/" comments, "asp;qb;vbs" for "" comments, "bas" for "REM" comments and "sql" for "--" comments [new in v1.31].
- Convert the selected text to hyperlinks in the forms: text , text and text.
- Convert text delimited with tabs or "!" characters to tables. New lines can be used to create multiple rows.
- Encode text using numeric entities.
- Insert a list of files in a specific folder that match the given file mask.

Notes:

- The "|" (pipe) character is no longer used as a column delimiter when converting lines to a table [new in v1.50].

Usage:

- To comment or uncomment a block of text: open the drop-down menu under the comments button and select the style of the comment.
- To create a commonly used hyperlink based on the selected text: select the tag style from the anchor menu.
- To create a table from delimited text: use the "!" character (without quotes) to separate table cells. Use new lines to separate table rows. Select the text and click the table button. For example, "one!two!three" generates onetwothree.
- To encode text using numeric entities: select the text and click the email button. For example, "text" will be converted to: test.
- To insert a list of files: type the full path and the file mask. Select the path + mask and click the folder button. For example, type "C:\YourFolder*.html" (excluding quotes) and select it. Click the folder button of the plugin. A list of matching files will be inserted, assuming that there are *.html files in a folder named C:\YourFolder\ on the computer.

Requirements

- HTML-Kit Build 292

Download

- Address:
<http://htmlkit.com/go/plugin/aatools>
- Download size: 7.91 KB

Support Options

- Support Forums:
<http://htmlkit.com/newsgroups/>
- Visit the Author's Website:
<http://www.my-site.it/info/>

See Also

- aaHideMailto
- aaWIBean
- aaHelpSVG

Common Questions

Q: How do I install aaTools?

A: Download the "aaTools" plugin and save it to a folder of your choice (for example, c:\webfiles\). It's not necessary to manually extract the *.zip file, HTML-Kit will expand it to the proper folder during the installation.

Select "Install | Install Plugin" from HTML-Kit's "Tools" menu. Point to the downloaded *.zip file and click "Open."

If any additional prompts appear, follow them to complete the installation.

Q: How do I run it?

A: Tools

aaTools's icon will appear on the "Tools" tab on HTML-Kit's Actions Bar. It can also be invoked from the "Actions | Tools" sub menu.

Q: Which programming language was used to write it?

A: aaTools was written in hkScript. More plugins written in hkScript can be found on the Plugins page.

Q: Whats' the quickest way to uninstall aaTools?

A: Right click the aaTools icon on the Actions Bar and select "Uninstall." Alternatively, the "Tools | Install | Uninstall Plugins" menu option in HTML-Kit can be used to uninstall this and other plugins.

Q: Do I need the exact versions of software listed under the Requirements?

A: The versions listed are the minimum versions required by this plugin. For example, a plugin that requires HTML-Kit Build 290 will run on HTML-Kit Build 292 as well.

Q: What's the best way to check which version of HTML-Kit I'm using?

A: The build number can be found on the "About" dialog, which is located on HTML-Kit's "Help" menu.

01-Dec-2005

<http://www.htmlkit.com/plugins/>