


# prPLSQLConv



By Peter Preier

<http://htmlkit.com/go/plugin/prplsconv>

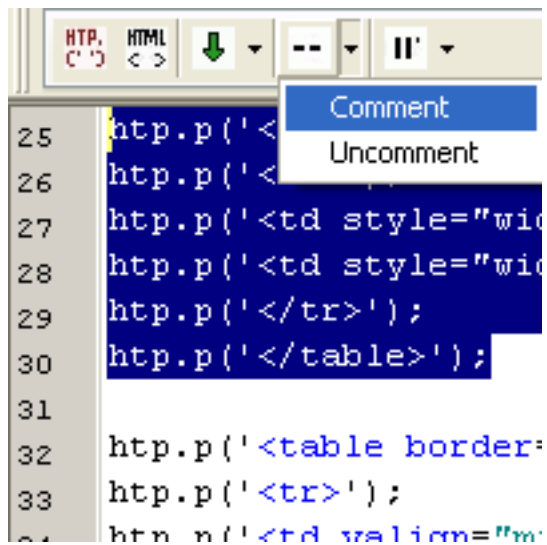

Version:	1.0
Date Published:	29-Nov-2005
Author:	Peter Preier

## Description

Adds options for converting between text and plsql statements, commenting/uncommenting and inserting other htp.p() related code snippets.

Features:

- Converts text and HTML tags to plsql htp.p() statements.
- Converts htp.p() statements back to text/HTML.
- Comments the selected text.
- Uncomments previously commented text.
- Inserts htp.p("") and htp.nl; code snippets.
- Inserts '|| variable ||' with or without the selected text.

Usage:

- To convert text to htp.p() statements: select the text to be converted and click the "HTP" icon.
- To convert htp.p() statements back to the original text: select the statements and click "HTML".
- To comment/uncomment: select the related option from the "--" drop-down menu.

## Requirements

- HTML-Kit Build 292

## Download

- Address:

<http://htmlkit.com/go/plugin/prplsconv>

- Download size: 2.68 KB

## Support Options

- Support Forums:  
<http://htmlkit.com/newsgroups/>
- Visit the Author's Website:  
<http://www.preier.com>

## Common Questions

*Q: How do I install prPLSQLConv?*

A: Download the "prPLSQLConv" plugin and save it to a folder of your choice (for example, c:\webfiles\). It's not necessary to manually extract the \*.zip file, HTML-Kit will expand it to the proper folder during the installation.

Select "Install | Install Plugin" from HTML-Kit's "Tools" menu. Point to the downloaded \*.zip file and click "Open."

If any additional prompts appear, follow them to complete the installation.

*Q: How do I run it?*

A: PL/SQL

prPLSQLConv's icon will appear on the "PL/SQL" tab on HTML-Kit's Actions Bar. It can also be invoked from the "Actions | PL/SQL" sub menu.

*Q: Which programming language was used to write it?*

A: prPLSQLConv was written in hkScript. More plugins written in hkScript can be found on the Plugins page.

*Q: Whats' the quickest way to uninstall prPLSQLConv?*

A: Right click the prPLSQLConv icon on the Actions Bar and select "Uninstall." Alternatively, the "Tools | Install | Uninstall Plugins" menu option in HTML-Kit can be used to uninstall this and other plugins.

*Q: Do I need the exact versions of software listed under the Requirements?*

A: The versions listed are the minimum versions required by this plugin. For example, a plugin that requires HTML-Kit Build 290 will run on HTML-Kit Build 292 as well.

*Q: What's the best way to check which version of HTML-Kit I'm using?*

A: The build number can be found on the "About" dialog, which is located on HTML-Kit's "Help" menu.

29-Nov-2005

<http://www.htmlkit.com/plugins/>