


hkTableStarter



<http://htmlkit.com/go/plugin/hktablestarter>

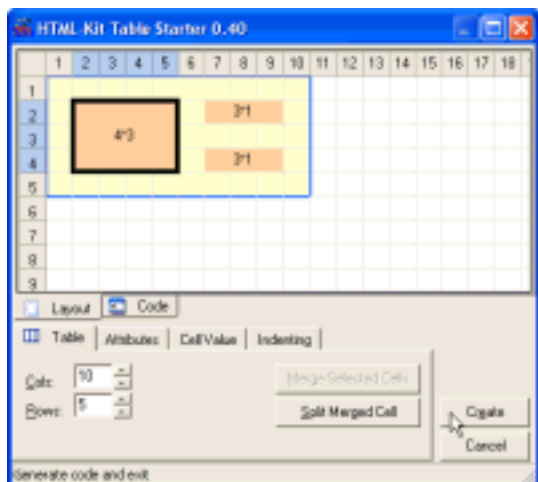

Version:	0.51
Date Updated:	17-Mar-2005
Author:	HTML-Kit Support

Description

Adds a graphical interface for starting HTML tables.

Features:

- Provides a graphical user interface for starting HTML tables.
- Ability to create tables with complex merged cells.
- Save and open table layouts [new v0.51].
- Preview window for testing the table before inserting the generated HTML code [new v0.51].
- Snippets library for obtaining ready-to-use table layouts [new v0.51].
- Scrollable layout window [new v0.51].
- Customizable layout size, TABLE tag attributes and empty cell value.
- Ability to customize TR and TD tag attributes.
- Space for entering tags that appear above and below the table.
- Options for adding alternating background colors and other styles to table rows and columns with rotating classes [v0.44].
- Formats HTML code according to preferences under "Edit | Preferences | Format".
- Previews table code changes in real-time.
- Ability to change the size of indents, using spaces or tabs.
- Syntax highlighted code preview window.
- Remembers dialog position, size and options between sessions.

Usage:

- To insert a new table: invoke the plugin, adjust the number of rows/columns and click the "Create" button.
- To create a table with one or more merged cell areas: select the cells that should be merged by moving the mouse while holding the mouse button down, and click the "Merge selected cells" button.
- To view the table code or to preview table code changes: change to the "Code" tab and adjust the options as necessary.
- To customize tag attributes: update options on tabs for TABLE, TR and TD attributes.
- To add alternating colors to table rows: change to the "TR attributes" tab and check the "Add rotating classes" option. Click "Create" to generate the table. Each row in the table will have a rotating class name for easily adding alternating background colors and other styles. To test the final result, copy the sample styles at the bottom of the table and insert into a . . . block [v0.44].
- To insert tags above and below the table: change to the "Top/Bottom Tags" tab and enter the tags that should appear above and/or below . . . tags.
- To change the case/format of tags: select "Edit | Preferences | Format" from the main menu.

Requirements

- HTML-Kit Build 292

Download

- Address:
<http://htmlkit.com/go/plugin/hktablestarter>
- Download size: 0.69 MB

Support Options

- Support Forums:
<http://htmlkit.com/newsgroups/>

Common Questions

Q: How do I install hkTableStarter?

A: Download the "hkTableStarter" plugin and save it to a folder of your choice (for example, c:\webfiles\). It's not necessary to manually extract the *.zip file, HTML-Kit will expand it to the proper folder during the installation.

Select "Install | Install Plugin" from HTML-Kit's "Tools" menu. Point to the downloaded *.zip file and

click "Open."

If any additional prompts appear, follow them to complete the installation.

Q: How do I run it?

A: Tables

hkTableStarter's icon will appear on the "Tables" tab on HTML-Kit's Actions Bar. It can also be invoked from the "Actions | Tables" sub menu.

Q: Whats' the quickest way to uninstall hkTableStarter?

A: Right click the hkTableStarter icon on the Actions Bar and select "Uninstall." Alternatively, the "Tools | Install | Uninstall Plugins" menu option in HTML-Kit can be used to uninstall this and other plugins.

Q: Do I need the exact versions of software listed under the Requirements?

A: The versions listed are the minimum versions required by this plugin. For example, a plugin that requires HTML-Kit Build 290 will run on HTML-Kit Build 292 as well.

Q: What's the best way to check which version of HTML-Kit I'm using?

A: The build number can be found on the "About" dialog, which is located on HTML-Kit's "Help" menu.

18-Mar-2005

<http://www.htmlkit.com/plugins/>