


hkBlockIndent



<http://htmlkit.com/go/plugin/hkblockindent>

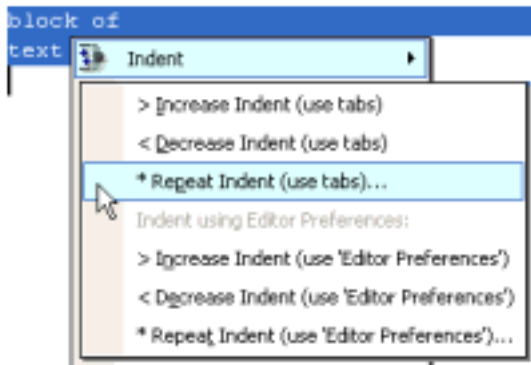

Version:	0.91
Date Updated:	18-Dec-2004
Author:	HTML-Kit Support

Description

Indents the selected block of lines using tabs or spaces.

Features:

- Indents or unindents the selected block of lines.
- Tab characters (hard tabs) or spaces can be used to fill the indents.
- If no selection is found, selects and indents the current line [new].
- Ability to apply multiple indents (repeat indent).
- Plugin options can be accessed using the drop-down menu on the Actions Bar or the "Indent" option on the right click menu.

Usage:

- To indent a block of lines using tab characters: select the lines to indent, right click and select "Indent | Increase indent (use tabs)".
- To indent the selected block of lines 5 times: select "Repeat Indent" from the drop-down menu (or the "Indent" right click menu), enter 5 and click the "OK" button.
- To decrease the indent 3 times: select "Repeat Indent," enter -3 and click the "OK" button.

Notes:

- HTML-Kit Build 292 has built-in support for indenting using space characters. The "Edit | Increase Indent" / "Edit | Decrease Indent" main menu options or Tab / Shift+Tab keys can be used to indent/unindent the selected block of lines. This plugin adds options for

multiplying indents and indenting using tabs or spaces.

Requirements

- HTML-Kit Build 292

Download

- Address:
<http://htmlkit.com/go/plugin/hkblockindent>
- Download size: 3.35 KB

Support Options

- Support Forums:
<http://htmlkit.com/newsgroups/>
- Creating a shortcut for block / line indenting

Common Questions

Q: How do I install hkBlockIndent?

A: Download the "hkBlockIndent" plugin. It's not necessary to unzip the *.zip file, HTML-Kit will expand it to the appropriate directory during the installation.

Select "Install | Install Plugin" from HTML-Kit's "Tools" menu. Point to the downloaded *.zip file and click "OK."

If any additional prompts appear, follow them to complete the installation.

Q: How do I run it?

A: Document

hkBlockIndent's icon will appear on the "Document" tab on HTML-Kit's Actions Bar. It can also be invoked from the "Actions | Document" sub menu.

Q: Which programming language was used to write it?

A: hkBlockIndent was written in hkScript. More plugins written in hkScript can be found on the Plugins page.

Q: Whats' the quickest way to uninstall hkBlockIndent?

A: Right click the hkBlockIndent icon on the Actions Bar and select "Uninstall." Alternatively, the "Tools | Install | Uninstall Plugins" menu option in HTML-Kit can be used to uninstall this and other plugins.

Q: Do I need the exact versions of software listed under the Requirements?

A: The versions listed are the minimum versions required by this plugin. For example, a plugin that

requires HTML-Kit Build 290 will run on HTML-Kit Build 292 as well.

Q: What's the best way to check which version of HTML-Kit I'm using?

A: The build number can be found on the "About" dialog, which is located on HTML-Kit's "Help" menu.

29-Dec-2004

<http://www.htmlkit.com/plugins/>