


# hkContextMenuTags



<http://htmlkit.com/go/plugin/hkcontextmenutags>

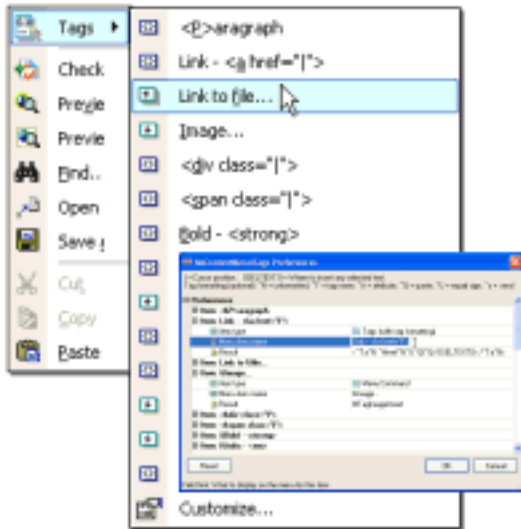

Version:	0.93
Date Updated:	12-Jun-2005
Author:	HTML-Kit Support

## Description

Adds a customizable list of tags and snippets to the right click menu.

### Features:

- Provides access to commonly used tags on the right click menu.
- The default menu includes options for inserting paragraphs, links, images, DIV/SPAN tags with the class attribute, STRONG/EM tags, HTML/CSS comments and custom tags/snippets.
- Ability to add custom options that can insert tags, import code snippets from files and invoke main menu commands.
- Also provides options for opening one or more files, URLs and folders windows. Folder windows can compliment the Workspace by making it easier to browse drives/folders and open files (using the "Right click > Send To > HTML-Kit" option) [new].
- Displayed options can be turned on/off without removing the content.

### Usage:

- To insert tags: right click inside an editor window and select "Tags".
- To wrap a block of text with a particular tag: select the text before right clicking and pick an option from the "Tags" menu.

- To customize the items on the menu: select "Customize" from the "Tags" menu (or pick "Preferences" from the plugin icon's drop-down menu, on the Actions Bar).

- To add a new item for inserting a tag: while in the plugin's preferences dialog, scroll down and expand an empty item. Select "Tags" from the "Item Type" drop-down menu, type a display name under "Menu item name," and enter the tag/snippet to insert in the "Results" field.

- To optionally control the cursor position: use the "|" character (without quotes) in tag/snippets to indicate the cursor position.

- To optionally incorporate the selected text into the snippet: use "{{SELTEXT}}" (without quotes) to indicate where the selected text should appear in the snippet.

- To optionally format the inserted tags: make sure that the "Item Type" can handle formatted tags, and use one of the following tokens: ^N = unformatted, ^T = tag name, ^A = attribute, ^Q = quote, ^U = equal sign, ^z = optional token. Refer to menu items in the plugin's preferences dialog for examples on how to format tags.

- To add a custom item for inserting a code snippet from a file: while adding a new item, select "Snippet from a File" from the "Item type" drop-down menu.

- To insert the special tokens as part of a code snippet: enter {{ASP\_LT}} where .

- To add a custom item for invoking a main menu command: while adding a new item, select "Menu Command" from the "Item type" drop-down menu. A list of commands can be obtained using the "Help | Command Names" main menu option.

- To open one or more folder windows: in the plugin preferences dialog, scroll down and expand an empty item. Select "Folder Window" from the "Item Type" drop-down menu and type a display name under "Menu item name." Enter the path to a drive or a folder to open in the "Results" field. More than one drive/folder can be entered by using ";" as the separator. For example, to open C:\ and D:\FILES\ enter C:\;D:\FILES\ in the "Results" field [new].

- To hide a menu option: while in the plugin's preferences dialog, select "Off / Disabled" from the "Item type" drop-down menu.

- To reset the menu to use the default options: select "Reset Preferences" from the plugin icon's drop-down menu.

Notes:

- The "Reset" button on the bottom of the customization dialog applies to all items, not only the currently selected item. It should not be used except for clearing all items.
- are special tokens used by the plugin. To insert these tokens using the plugin's right click menu, please use `{{ASP_LT}}` for in the plugin customization dialog [new v0.92].

## Requirements

- HTML-Kit Build 292

## Download

- Address:

<http://htmlkit.com/go/plugin/hkcontextmenutags>

- Download size: 7.12 KB

## Support Options

- Support Forums:

<http://htmlkit.com/newsgroups/>

## Common Questions

*Q: How do I install hkContextMenuTags?*

A: Download the "hkContextMenuTags" plugin and save it to a folder of your choice (for example, `c:\webfiles\`). It's not necessary to manually extract the \*.zip file, HTML-Kit will expand it to the proper folder during the installation.

Select "Install | Install Plugin" from HTML-Kit's "Tools" menu. Point to the downloaded \*.zip file and click "Open."

If any additional prompts appear, follow them to complete the installation.

*Q: How do I run it?*

A: Document

hkContextMenuTags's icon will appear on the "Document" tab on HTML-Kit's Actions Bar. It can also be invoked from the "Actions | Document" sub menu.

*Q: Which programming language was used to write it?*

A: hkContextMenuTags was written in hkScript. More plugins written in hkScript can be found on the Plugins

page.

*Q: Whats' the quickest way to uninstall hkContextMenuTags?*

A: Right click the hkContextMenuTags icon on the Actions Bar and select "Uninstall." Alternatively, the "Tools | Install | Uninstall Plugins" menu option in HTML-Kit can be used to uninstall this and other plugins.

*Q: Do I need the exact versions of software listed under the Requirements?*

A: The versions listed are the minimum versions required by this plugin. For example, a plugin that requires HTML-Kit Build 290 will run on HTML-Kit Build 292 as well.

*Q: What's the best way to check which version of HTML-Kit I'm using?*

A: The build number can be found on the "About" dialog, which is located on HTML-Kit's "Help" menu.

13-Jun-2005

<http://www.htmlkit.com/plugins/>